


Polyimide adhesive tape NO.360A

Features

- Offers superior electrical insulation.
- Offers superior heat resistance.
- Offers superior flame proofness. UL-510 Flame retardant certified

Structure

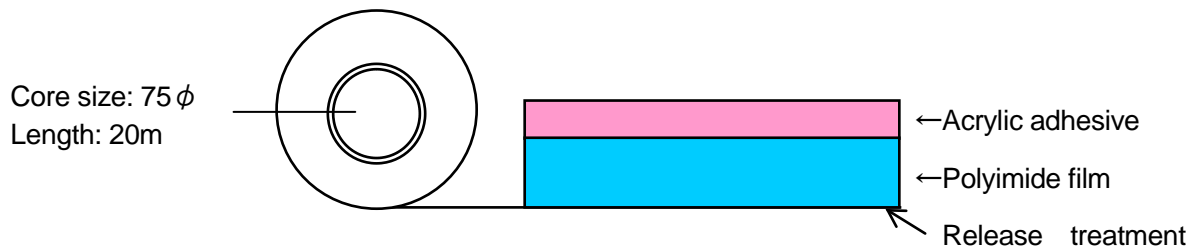

Applications

- Electrical insulation of inside battery.
- Electrical insulation and heat resistance.

Properties

Table 1 General Properties

Item	Unit	NO.360A	
		0.052 (0.025)	0.080 (0.050)
Total thickness (Backing)	mm	0.052 (0.025)	0.080 (0.050)
Color	—	Amber	
Peel adhesion	N/19mm	4.3	4.5
Tensile strength	N/19mm	145	250
Elongation	%	65	70
Breakdown voltage	(kV)	7.5	10.5

-For inquiries ...Technical Support Center, Electronics Device Materials Group T-COW
E-mail: tcow@nitto.co.jp TEL: 81-532-41-7559 FAX: 81-532-41-8446

NO.360A-e 1/1
262-32132E-1309

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.